

FIG. 3 is a perspective view of the device 100 in a first position. The device 100 includes a base 110 and a shaft 120. The base 110 is a rectangular block with a central opening 112. The shaft 120 is a long, thin rod that passes through the central opening 112. The shaft 120 has a threaded section 122 near the base 110. The device 100 is shown in a first position where the shaft 120 is extended upwards from the base 110.

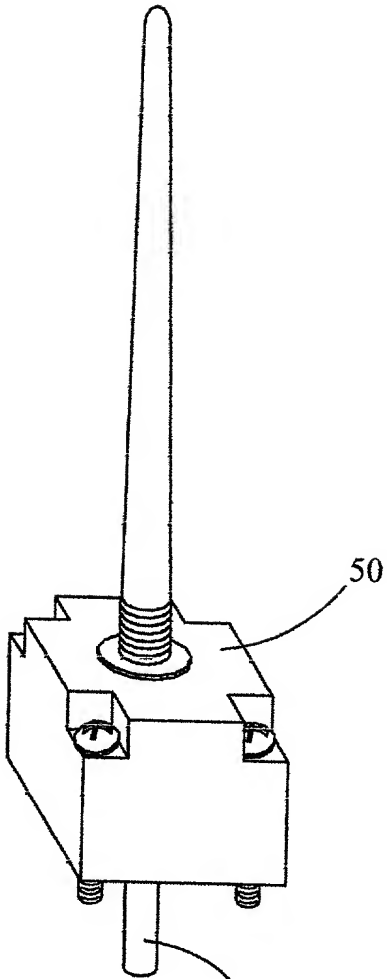
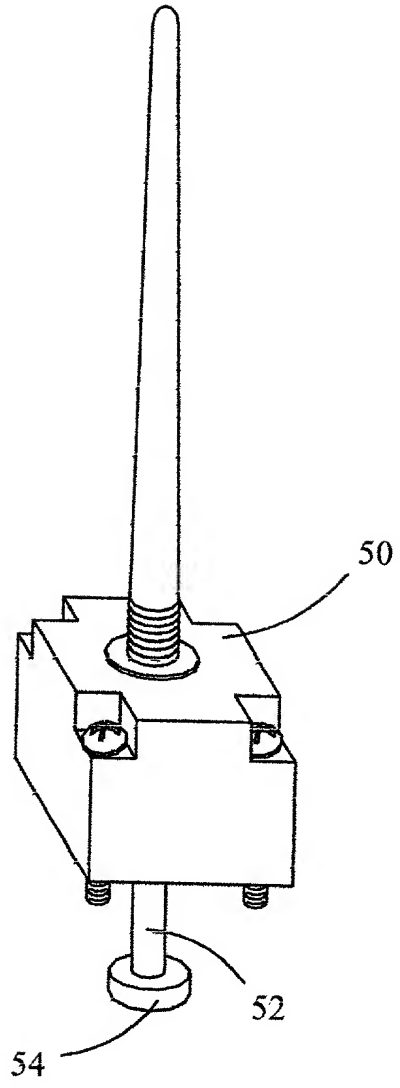
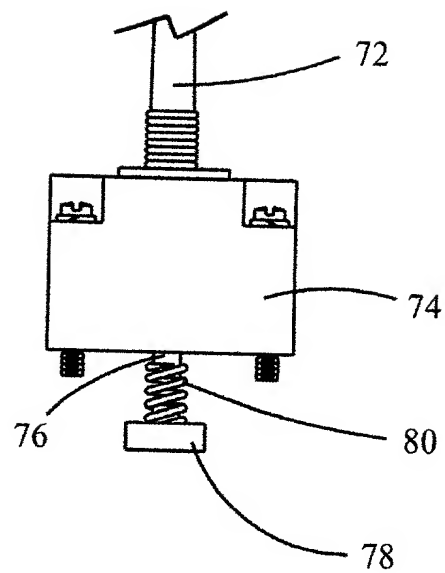
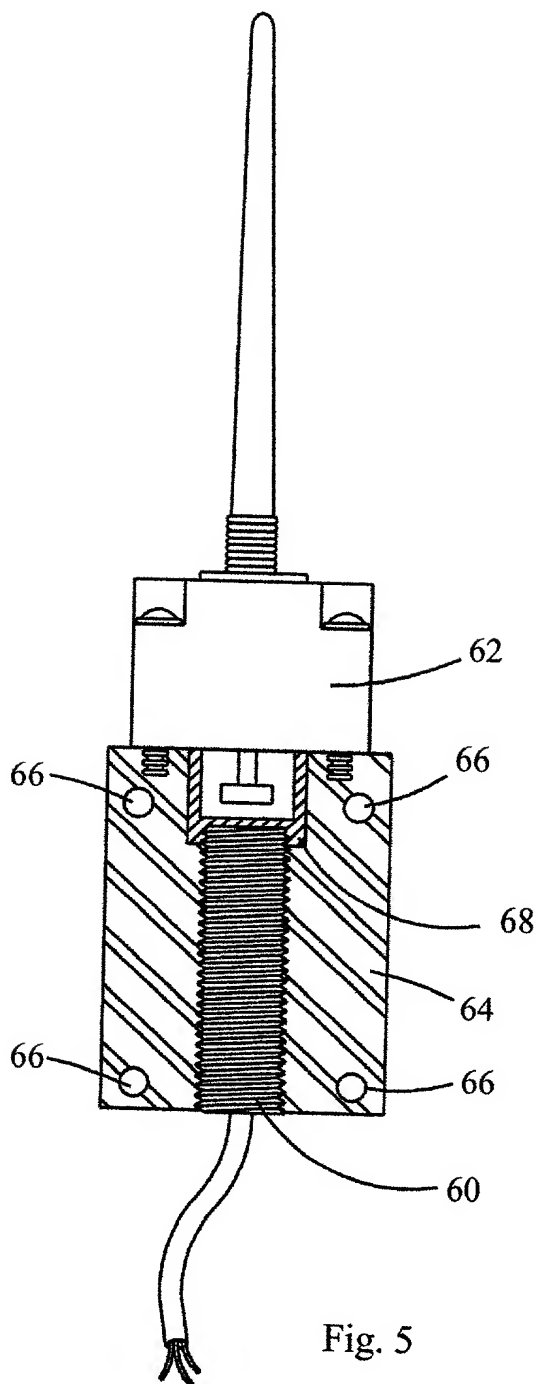


Fig. 3

Fig. 4





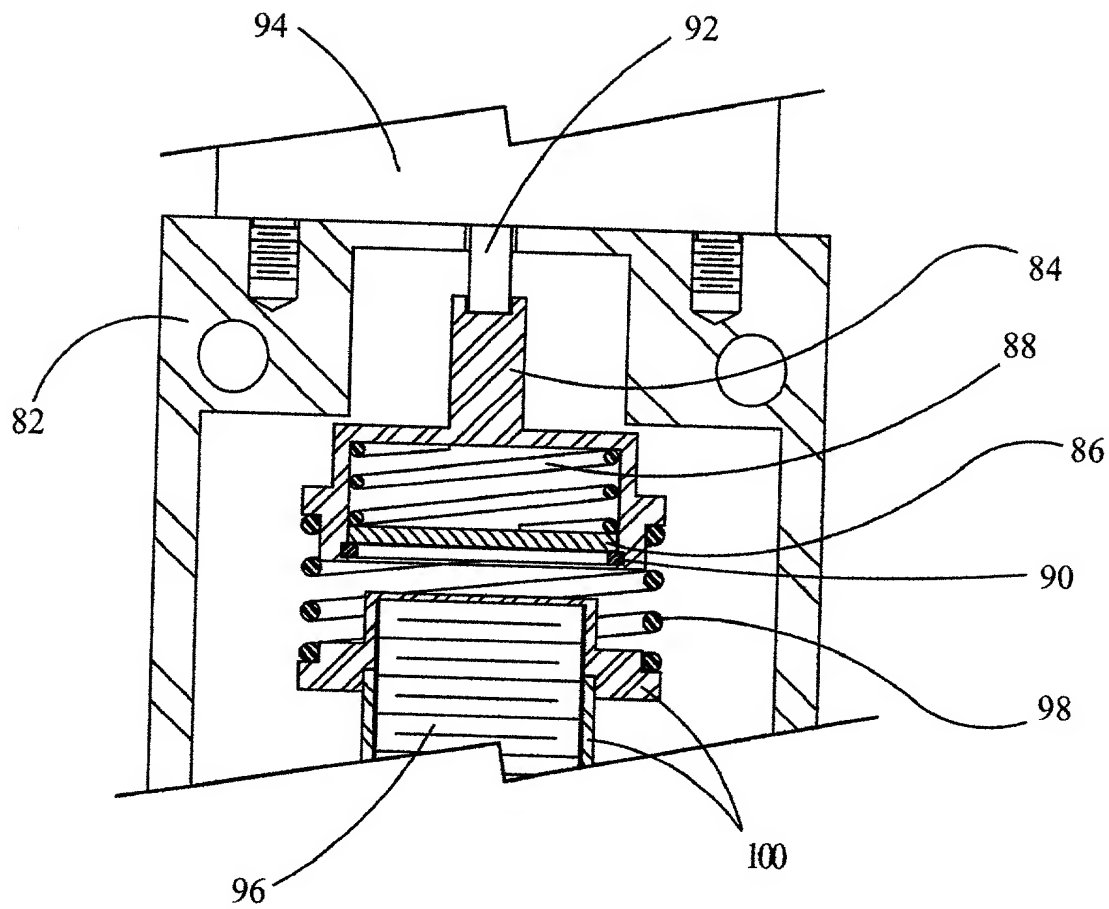


Fig. 7